



T32 Trash Can

For Fastener Pack
(FS-T32-CAP-01)

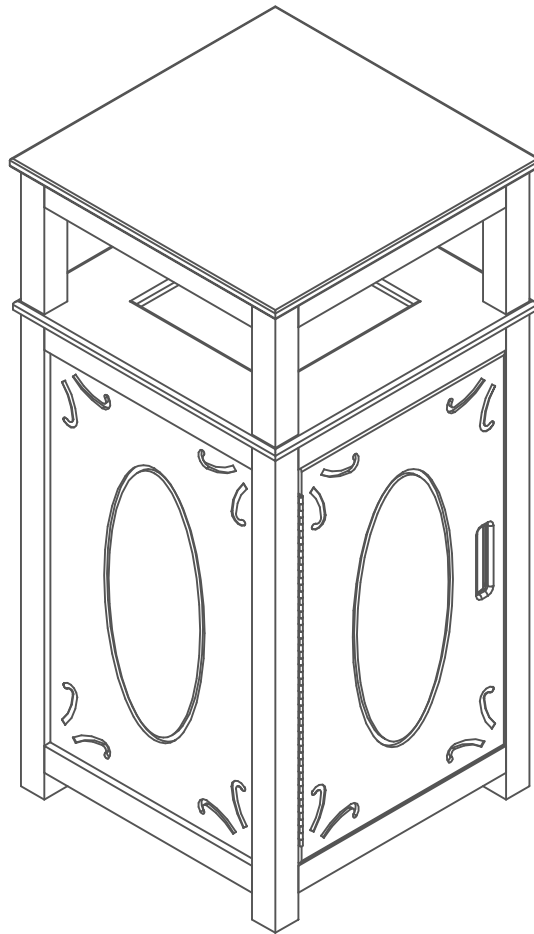


Congratulations ! !
You have just purchased the finest recycled plastic
Receptacles available. Enjoy ! ! !


Before assembly, please make sure all components are included.




(2) RP-T32-A-01




(2) RP-T32-B-01




(1) One Fastener Pack
FS-T32-CAP-01

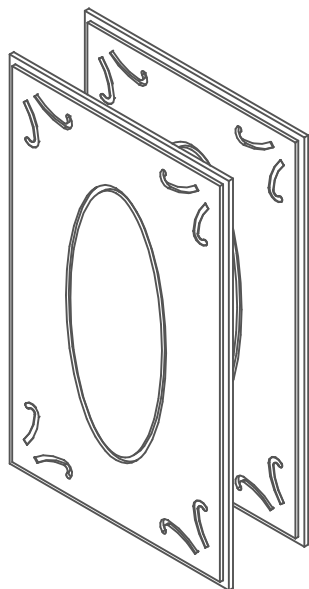


(2) RP-T32-C-01

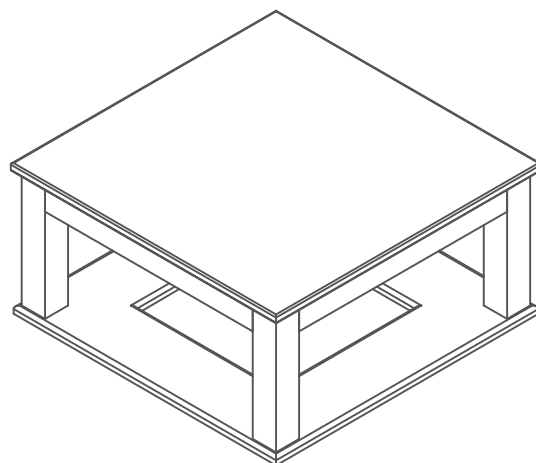


(1) SBA-T32-C-01

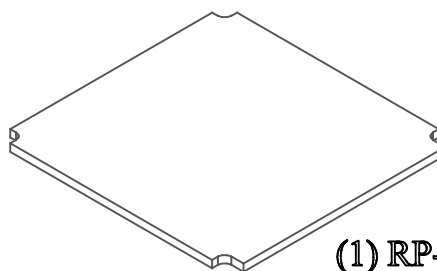


(1) RP-T32-D-01

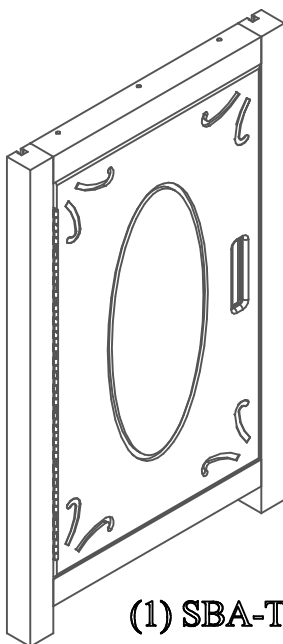

(1) SBA-T32-A-01

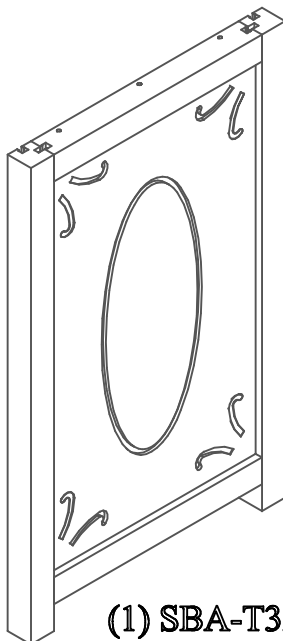

(1) SBA-T32-B-01

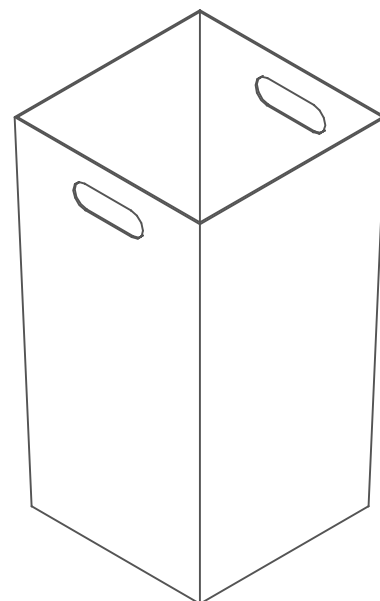


(1) One Trash can Liner
KC-S-7856

Before assembly, please make sure all fasteners are included.

24 - #12 x 2 1/2" Flat Head Phillips Screw




*If the fastener is a little tight or you are having a hard time getting them to slide together, use a hammer and screw driver to lightly tap the fastener in to place

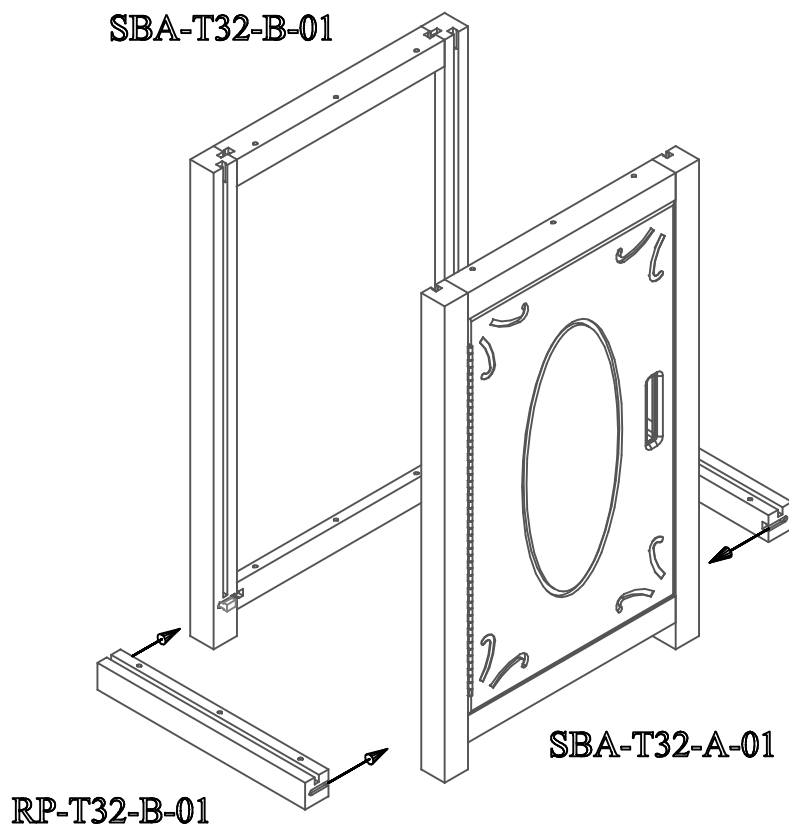

Step #1:

Take "*SBA-T32-B-01*" and "*SBA-T32-A-01*" and stand them up with design on the panels facing away from each other. Take 1 "*RP-T32-B-01*" and slide it on to the fastener of "*SBA-T32-B-01*", and then on to "*SBA-T32-A-01*" Repeat on the other side with the second "*RP-T32-B-01*".

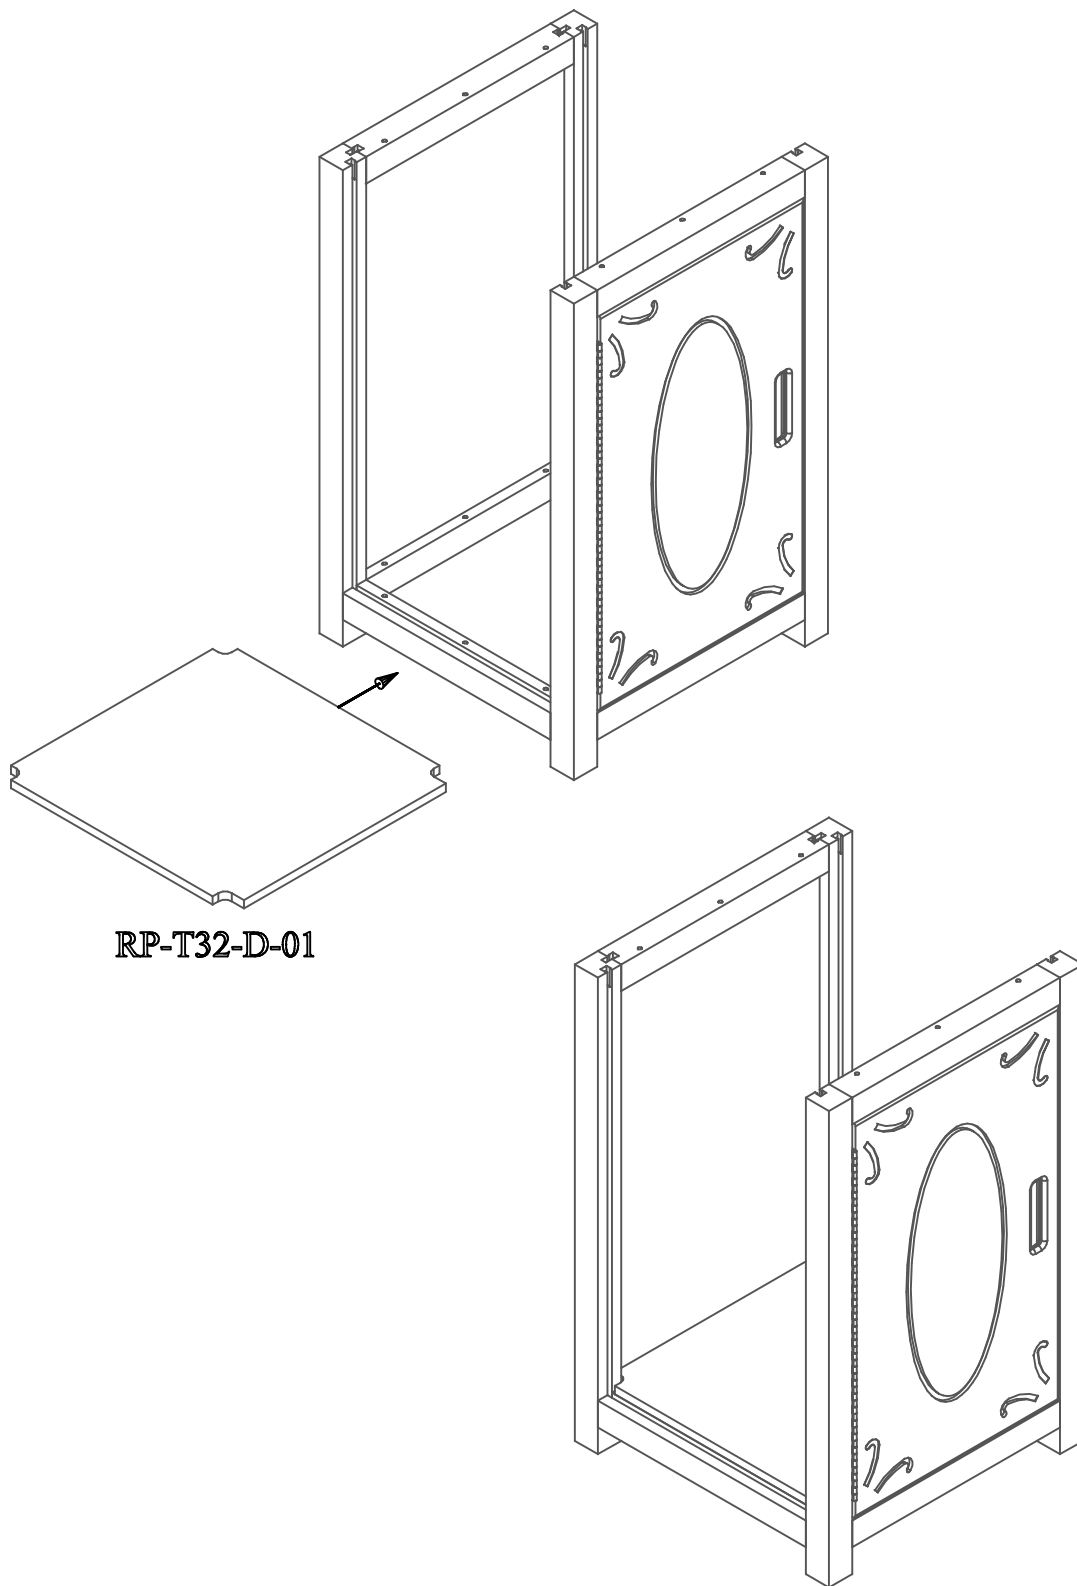


RP-T32-D-01

Step #2:

Take part "*RP-T32-D-01*" and place on the inside of trash receptacle. It will be fastened in a later process.


RP-T32-C-01

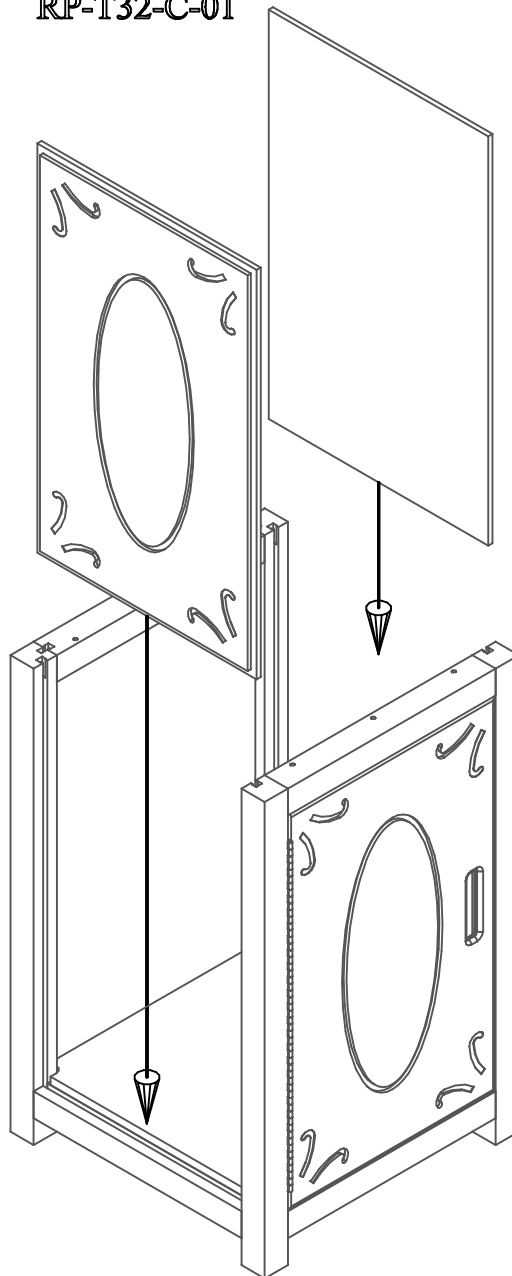

Step #3:

Take "*RP-T32-C-01*" Panel, and slide them in to the groves of the trash receptacle with the design on the panel facing out ward, away from each other.


*If the fastener is a little tight or you are having a hard time getting them to slide together, use a hammer and screw driver to lightly tap the fastener in to place

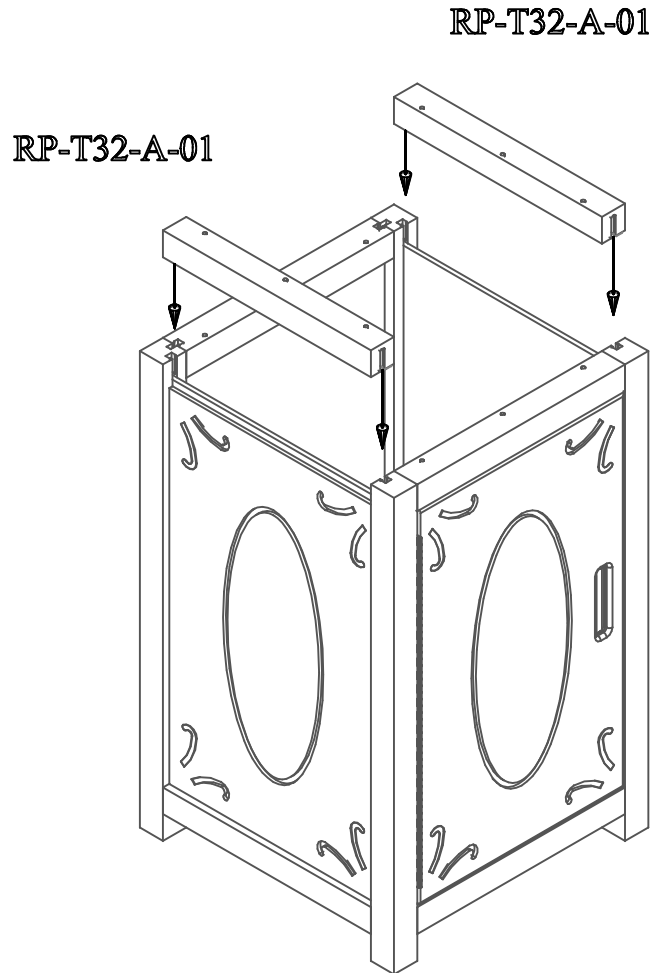

Step #4:


Take 1 "*RP-T32-A-01*" and attach to the "Dog Bone" fasteners on each side, while sliding over the panel. Repeat to the other side.

SBA-T32-C-01

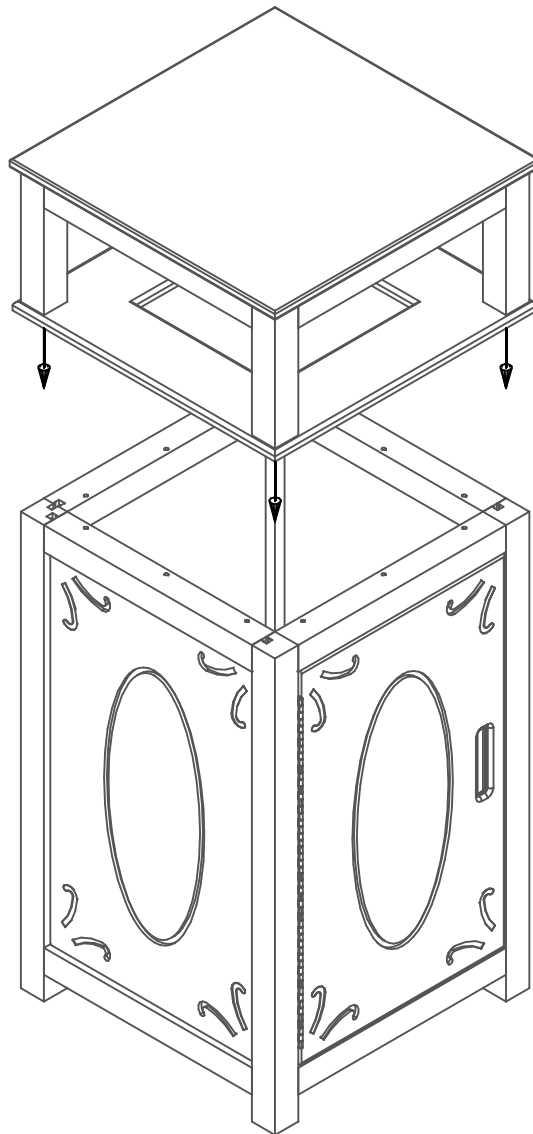


Step #5:

Take "*SBA-T32-C-01*" and set it down on top and center it to the best you can. (If you have panels in your top sub assembly, be sure to align the corresponding panel with the door.)

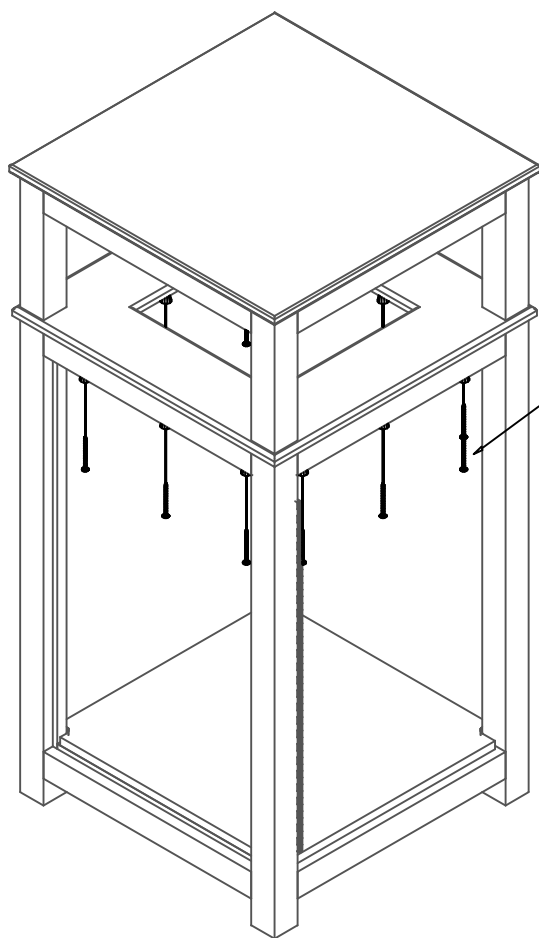

#12 x 2 1/2" Flat
Head Phillips Screw

View has been
altered for your
convenience

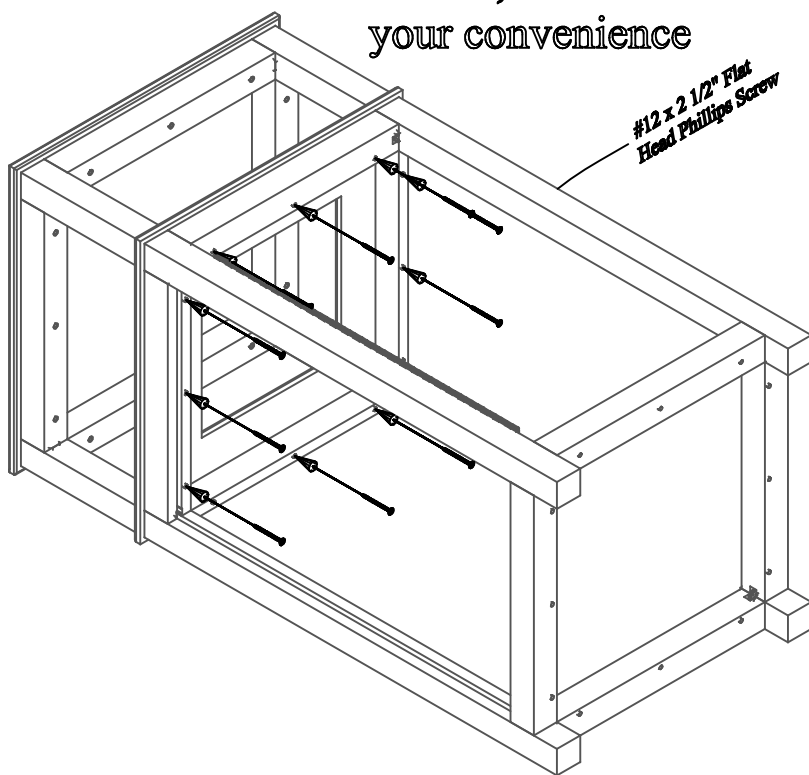


View has been
rotated, altered for
your convenience

#12 x 2 1/2" Flat
Head Phillips Screw

Step #6:

With the top sub assembly carefully lined up (predrilled pilot holes lined up with the drilled holes in the 2" x 2" boards), put 12 #12 x 2 1/2" *Flat Head Phillips Screws* in each hole. If having trouble lining up the holes, lift slightly up on the sub assembly while putting the screw through the pre-drilled holes to line it up.


*Careful not to over tighten, that will cause a striped hole.

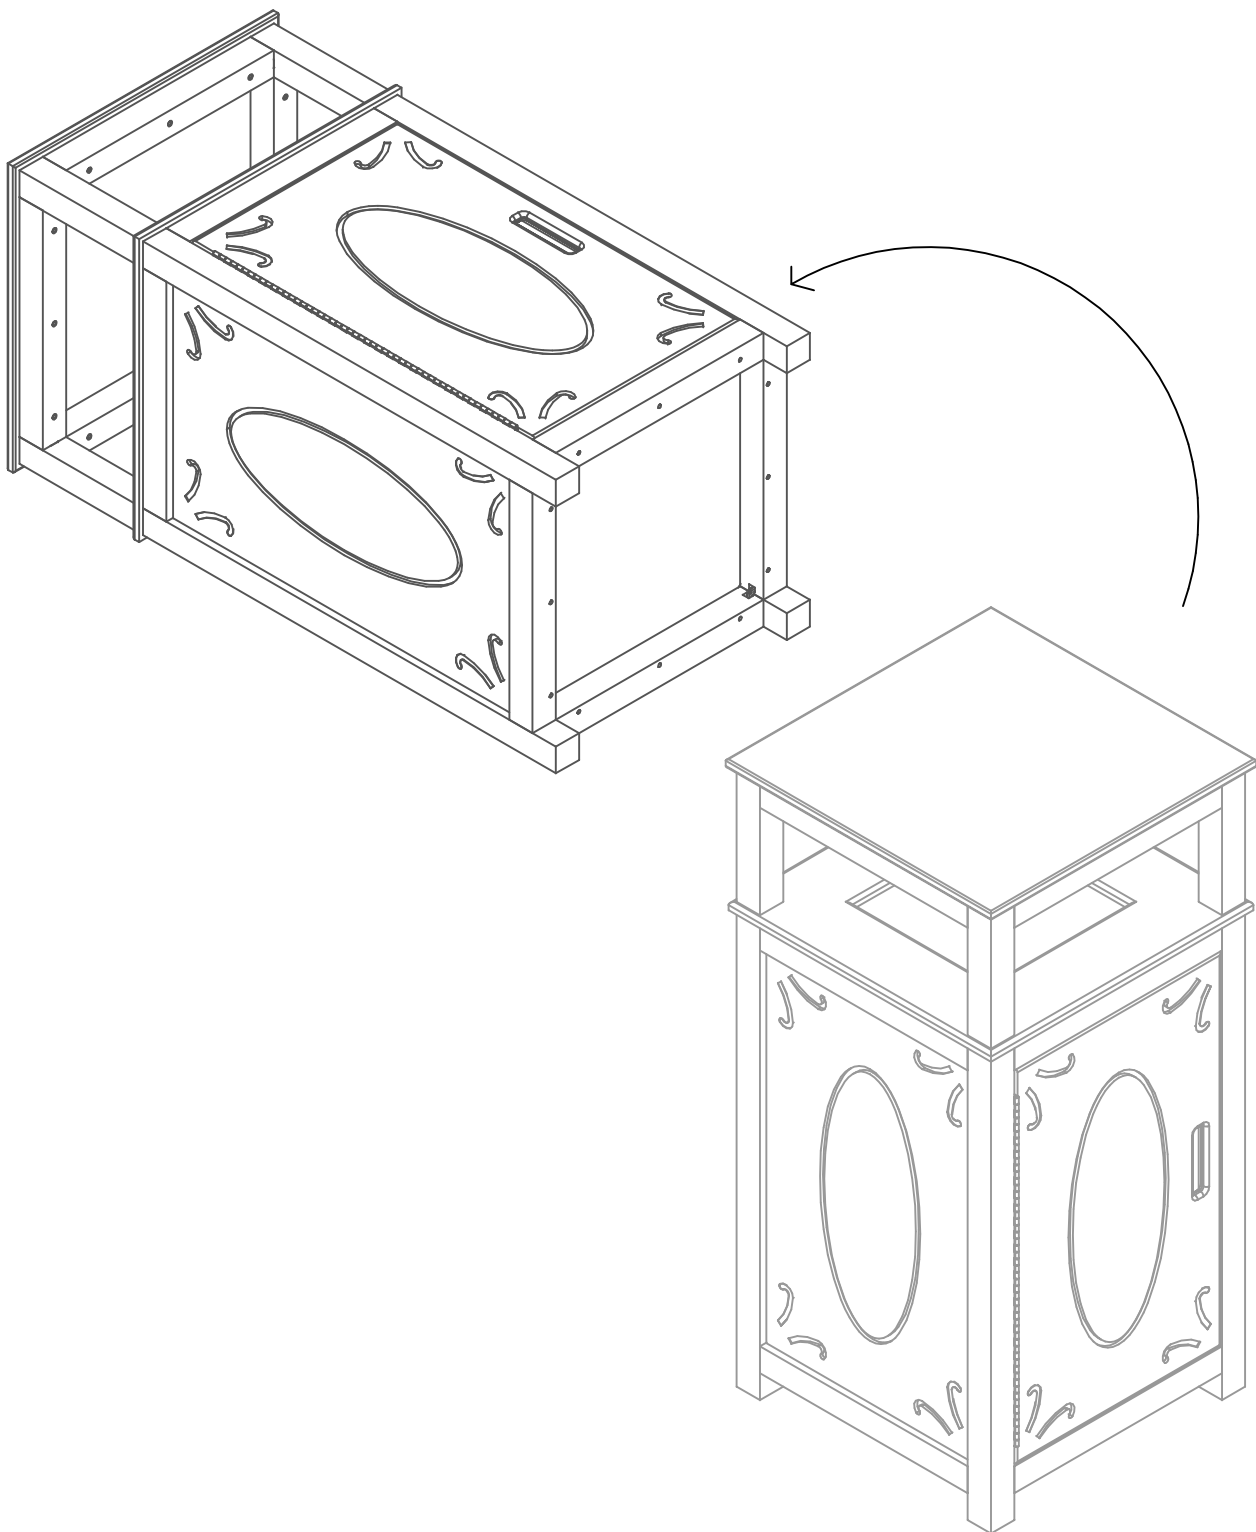

Step #7:


Rotate the trash receptacle on to its back gently.

* Note trash receptacle is heavy, use two people for moving and rotating.

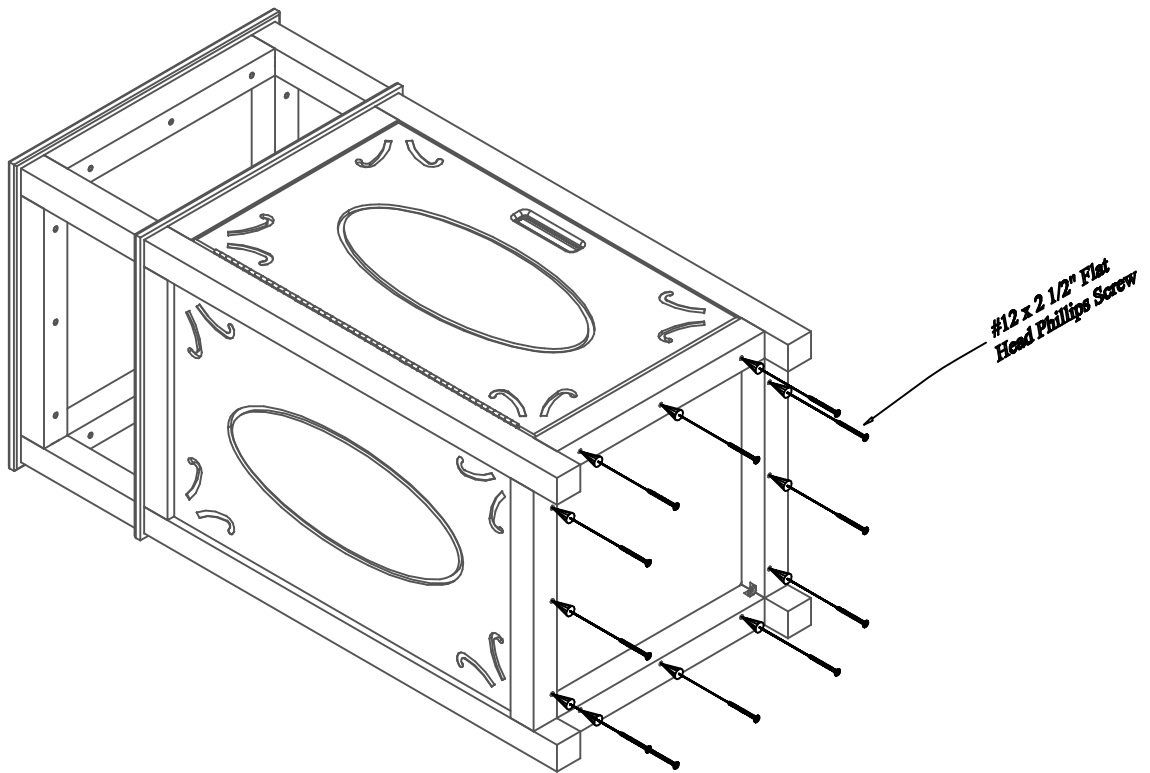

Step #8:

Align pre-drilled holes with "RP-T32-D-01" pilot holes, put 12 #12 x 2 1/2" Flat Head Phillips Screws in each of the holes.

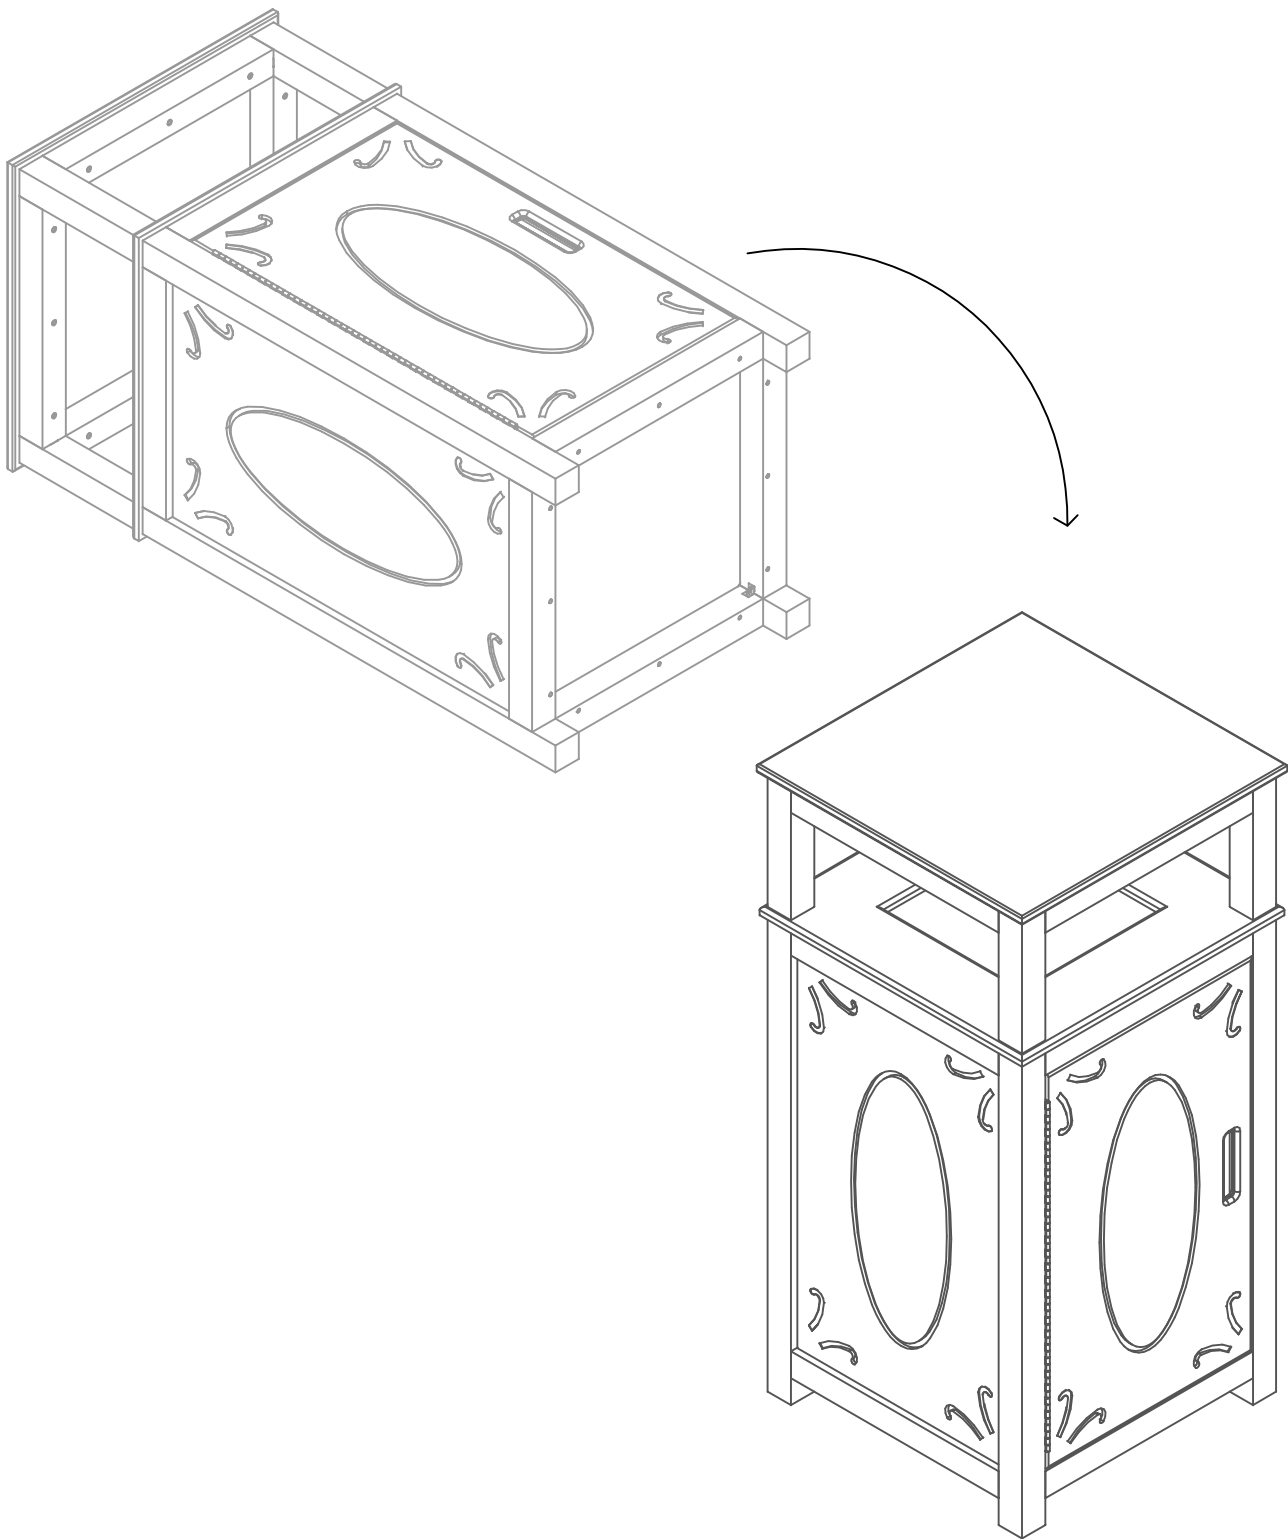

Step #9:

Rotate trash receptacle back to the standing position and insert your trash liner. Your receptacle is complete.

* Note trash receptacle is heavy, use two people for moving and rotating.